



IFW

PTO/SB/21 (09-04)

Approved for use through 07/31/2006. OMB 0651-0031

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# TRANSMITTAL FORM

(to be used for all correspondence after initial filing)

Total Number of Pages in This Submission

Application Number	10/707,551
Filing Date	12/20/2003
First Named Inventor	Stefan GUDMUNDSSON
Art Unit	2681
Examiner Name	NGYEN, DAVID Q
Attorney Docket Number	07589.0143.PCUS00

## ENCLOSURES (Check all that apply)

<input type="checkbox"/> Fee Transmittal Form <input type="checkbox"/> Fee Attached <input type="checkbox"/> Amendment/Reply <input type="checkbox"/> After Final <input type="checkbox"/> Affidavits/declaration(s) <input type="checkbox"/> Extension of Time Request <input type="checkbox"/> Express Abandonment Request <input type="checkbox"/> Information Disclosure Statement <input checked="" type="checkbox"/> Certified Copy of Priority Document(s) <input type="checkbox"/> Reply to Missing Parts/ Incomplete Application <input type="checkbox"/> Reply to Missing Parts under 37 CFR 1.52 or 1.53	<input type="checkbox"/> Drawing(s) <input type="checkbox"/> Licensing-related Papers <input type="checkbox"/> Petition <input type="checkbox"/> Petition to Convert to a Provisional Application <input type="checkbox"/> Power of Attorney, Revocation Change of Correspondence Address <input type="checkbox"/> Terminal Disclaimer <input type="checkbox"/> Request for Refund <input type="checkbox"/> CD, Number of CD(s) _____ <input type="checkbox"/> Landscape Table on CD	<input type="checkbox"/> After Allowance Communication to TC <input type="checkbox"/> Appeal Communication to Board of Appeals and Interferences <input type="checkbox"/> Appeal Communication to TC (Appeal Notice, Brief, Reply Brief) <input type="checkbox"/> Proprietary Information <input type="checkbox"/> Status Letter <input checked="" type="checkbox"/> Other Enclosure(s) (please identify below): Postcard
<div>Remarks</div>		

## SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT

Firm Name	NOYAK DRUCE & QUIGG, LLP		
Signature			
Printed name	Tracy W. Druce		
Date	02/01/2006	Reg. No.	35,493

## CERTIFICATE OF TRANSMISSION/MAILING

I hereby certify that this correspondence is being facsimile transmitted to the USPTO or deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450 on the date shown below:

Signature			
Typed or printed name	Daniel Hernandez	Date	02/01/2006

This collection of information is required by 37 CFR 1.5. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to 2 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

# PRV

PATENT- OCH REGISTRERINGSVERKET  
Patentavdelningen

## Intyg Certificate

*Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.*

*This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.*



(71) Sökande                      Volvo Technology Corp, Göteborg SE  
Applicant (s)

(21) Patentansökningsnummer    0000652-8  
Patent application number

(86) Ingivningsdatum                      2000-02-25  
Date of filing

Stockholm, 2004-02-17

För Patent- och registreringsverket  
For the Patent- and Registration Office

*Hjördis Segerlund*  
Hjördis Segerlund

Avgift  
Fee            170:-

**CERTIFIED COPY OF  
PRIORITY DOCUMENT**

PATENT- OCH  
REGISTRERINGSVERKET  
SWEDEN

Postadress/Adress                      Telefon/Phone  
Box 5055                                      +46 8 782 25 00  
S-102 42 STOCKHOLM                      Vx 08-782 25 00

Telex  
17978  
PATOREG S

Telefax  
+46 8 666 02 86  
08-666 02 86

**BEST AVAILABLE COPY**

Ink. t. Patent- och reg.verket

2000 -02- 2 5

Huvudfoxen Kassan

1

C.13264/KS, 2000-02-25

## Title:

A system and a method for providing a communication link

5

## TECHNICAL FIELD

10

The present invention relates to the field of wireless communication, and more precisely, to a system and a method for providing a communication link between a central station and a remote mobile or stationary object by means of transmitting and receiving communication means for speech and data transmission. The invention also relates to a use of such a system.

15

## BACKGROUND OF THE INVENTION

20

US 5890061 discloses an emergency message system for a mobile vehicle for communication with a response centre. A cellular transceiver has a restricted and an unrestricted operation mode. The restricted operating mode is selectable by a user to establish communication links that are permitted during normal operation, whereas the unrestricted operation mode is activated prior to initiating a request for assistance in case of emergency, thereby allowing a more reliable connection over a cellular telephone network.

25

30

Further, emergency message systems for mobile vehicles are disclosed in US 5781101, US 5687215, US 5686910 and US 5572204, respectively. A user can request emergency or roadside assistance from a response service centre by activating a button in the vehicle. The global positioning system is used to continuously store the vehicle location. A cellular telephone network is used to

Ink t. Patent- och reg.verket

2000 -02- 2 5

Huvudfaxen Kassan

2

5                   contact the service centre and to transfer via modem, a  
data string containing information to assist the service  
centre in acting on the request. The various systems  
comprise additional means either for storing system  
information, for sending a termination tone to the  
vehicle upon satisfactory completion of the request, for  
initiating an automatic call-in to the service centre if  
a predetermined time has elapsed since the last  
connection and for initiating a second call to a  
10                  different number if a first attempt to contact the  
response centre has been unsuccessful, respectively.

15                These prior art systems are not very well suited to  
environments and situations where a vehicle travels  
across a border from one country to another. Usually,  
this involves the transfer of responsibility from one  
service centre operator to another. A large amount of  
functionality is needed for this transfer to function  
smoothly, without risk of interrupting service.

20                For example, a customer database will have to be  
maintained and updated at every customer service station.  
It is a problem for a large number of customer service  
station operators to allocate resources for up grading  
25                and scaling up the telematic infra-structure in response  
to a growing number of service clients. Also, it will be  
difficult to add or remove services to this environment  
where different service operators may have different  
types of system platforms with completely different  
30                interfaces to service clients.

It would be desirable for a service client to have access  
to the same level of service, and via a transparent

Ink. t. Patent- och reg.verket

2000 -02- 2 5

Huvudfaxen Kassan

3

interface, when travelling across a continent, for example Europe.

## SUMMARY OF THE INVENTION

5 What are needed are therefore a system and a method for providing a communication link between a central station and a remote mobile or stationary object that avoids the above described disadvantages. According to the invention, this is achieved by providing the communication link with  
10 both a speech transmission link between the central station and the operator of the remote object, as well as a data transmission link between the remote object and the central station which is routed via a centralized communication and database server for handling operator and/or object related information. This system and method is especially suitable and provided for exchange of information, data and even software programs, as well as for voice communication between cars, trucks boats or other vehicles on one hand and at least one central  
15 station on the other hand. This central station may for example be a center or service station of a manufacturer, a head station for guiding or operating the vehicles, or for providing assistance in case of emergency or accident, respectively. Further, the system and method is suitable and provided for communication with facilities and plants in remote areas which are operated, controlled, observed or monitored from one or more of those central stations.  
20

25 According to an advantageous embodiment of the invention, the communication and database server comprises a  
30 communication server with functionality for handling operator and object identification, an operator and object information database as well an application server with

Ink. t. Patent- och reg.verket

2000 -02- 2 5

Huvudfaxen Kassar

4

functionality for making relevant information available to the central station.

5 According to another embodiment of the invention, the application server is provided with functionality for updating operator and object information.

10 Preferably, the communication links are established via a cellular communication network or a satellite communication network.

15 In a particular embodiment of the invention, the central station is a customer service center and the remote object is a vehicle, a boat, a plane or a remote facility or plant. This vehicle, boat or plane may be provided with a Global Positioning System, GPS, for providing information regarding its position.

20 The method according to the invention is characterized in the steps of establishing a speech connection between the central station and the remote object, and simultaneously establishing data connections between the remote object and a communication and database server as well as between the central station and said communication and database server.

25 According to a preferable embodiment of the method according to the invention, it includes the steps of locating the position of the remote object, controlling the functional and operational status of the remote object and its operator, and adapting the response to the type of service requested.

30

Ink. t. Patent- och reg.verket

2000 -02- 2 5

Huvudfaxen Kassar

5

According to still another embodiment of the method, it includes the steps of providing the communication and database server with the functionality for adding, removing and updating services.

5

#### BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be further described in the following, in a non-limiting way with reference to the accompanying drawings in which:

- 10 FIG 1 is a schematic view showing elements of a system according to the invention, including remote objects, a public switched telephone network, a customer service center and a telematics enterprise manager, and
- 15 FIG 2 illustrates in more detail the relationship of the telematics enterprise manager and different customer service centers.

#### DETAILED DESCRIPTION OF THE INVENTION

- 20 Fig 1 shows the major components of a preferred embodiment of the inventive system and its environment. It comprises a customer service center server (CSCS) 10 and a customer service center (CSC) 11 with an operator 12. At least one vehicle 13, vessel or a plane, as well as one or more
- 25 stationary objects like a remote facility or plant are able to communicate with the CSCS 10 and the CSC 11 via a cellular communication network 14 like GSM (European standard) or AMPS (US standard) and/or a satellite communication network 15, both for voice communication,
- 30 and for exchange of information data, each in both directions. Further, even software programs may be transmitted if necessary. The vehicle position may be detected by means of the global positioning system (GPS)

Ink. t. Patent- och reg.verket

2000 -02- 2 5

6

Huvudfaxen Kassan

5

16. An emergency assistance vehicle 17 and a roadside assistance vehicle 18 communicate with the CSC 11 in a similar manner or in any other way and are activated by the CSC in response to an assistance request from the vehicle 13.

10

In general, the system provides telephone services and emergency and technical assistance using both cellular and satellite communication. This allows for a reliable connection both between the vehicle and the CSCS and the vehicle and the CSC, as well as between the CSCS and the CSC. For example, the speech link between the vehicle and the CSC may be used as a backup for transmission of data via DTMF, e.g. in case of an interrupt of the data transmission link between the vehicle and the CSCS.

15

20

The above-described system can automatically handle emergency situations, remote diagnostics, and maintenance and command to said vehicle 13. Further, a vehicle driver or operator of a remote facility can manually request assistance or trigger an emergency signal to the CSC and the CSCS, and additionally, the vehicle or remote facility can automatically inform the CSC and the CSCS in case of emergency, malfunction or for other reasons. All these exchange of data, voice and information (and even software) is conducted with high reliability due to the use of both cellular and satellite communication. The actual position of the vehicle is evaluated by means of the global positioning system.

25

30

The relationship between the customer service station server (CSCS) 10 and a number of individual customer service centers (CSC) 11 is shown in Fig. 2. The CSCS is



Ink. t. Patent- och reg.verket

2000 -02- 2 5

Huvudfaxen Kassan

7

provided with a communication server 19 for handling data communication via cellular or satellite communication networks 20, from a service system client vehicle 13 or a remote facility. A service request message from the vehicle 13 or the remote facility is transferred to a functionality application server 21 who activates relevant service functionality corresponding to a customer service subscription. This process involves retrieval of relevant information data from a customer and vehicle database 22. The retrieved information data is routed by a central service center manager 11 to the respective local CSC operator 11a which has initially been selected as the most suitable for responding to the service request message from the customer, and which simultaneously is linked via a separate speech link to the customer, either by means of a cellular or a satellite communication network.

Thus, the CSCS 10 supplies the selected local CSC 11a with all customer and vehicle information needed for responding to the service request message. For example, this information may include customer address, vehicle registration number, vehicle type and specifications, a diagnostic report like engine status and brake status or malfunction, as well as the GPS position data of the vehicle. This information may be used by the CSC for adapting its response to the service request message, so that vehicle maintenance and repair may be performed with accuracy. The customer and vehicle database 22 may receive new vehicle data from a vehicle dealer 23 and new customer subscription data from a customer 24, for example via a World Wide Web server 25.

Ink. t. Patent- och reg.verket

2000 -02- 2 5

8

Huvudfaxen Kassan

5 Each customer service center 11 may represent a national service center operator which is provided with a database that may include relevant national level data, e.g. maps, local roadside traveler service, traffic jam information, ferry operator information and similar information that is vital to a traveler.

10 Billing information to the customer may be sent from the CSC 11 via the functionality application server 21 and the customer and vehicle database 22 to a billing server 26.

15 The above described system offers the possibility for the functionality application server 21 to retrieve information from or send command to any module in the vehicle 13 connected to the internal vehicle data bus or network. These reports and information can be stored by the customer and vehicle database 22 and be used for vehicle maintenance and repair.

20 The above-described system may be automatically activated by means of at least one sensor, which for example detects an air-bag deployment. Also, the service subscription can be activated by an alarm in case of theft.

25 A conflict concerning simultaneous execution of several such services is handled automatically by the functionality application server 21 by assigning and affecting a priority to each service type. Preferably, an air-bag deployment notification has the highest priority.  
30 If for example a driver asks for roadside assistance, the roadside assistance service of the system is activated. If subsequently the driver or a sensor signals an emergency, the roadside assistance is deactivated and the emergency

Ink. t. Patent- och reg.verket

2000 -02- 2 5

Huvudfoxen Kassan

9

assistance service is activated. If then an accident occurs, the emergency assistance service is deactivated and an air-bag deployment notification is activated.

5 The driver of a vehicle 13 can request service in any case. If he or she is lost, vehicle position is reported using GPS controller, and navigational information is provided by voice or data communication. If the vehicle has broken down, remote vehicle diagnostics may be performed, vehicle position is reported using GPS and breakdown mechanic and roadside assistance is informed. 10 These are only a few examples of possible assistance the above-described system may offer.

15 The inventive system manages cellular communication and satellite communication as a backup when no cellular network is currently available. The inventive system is modular and can be customized according to the needs.

20 Possible applications concern any critical object in remote areas and which is accessible with difficulties. The object may for example be a water pump in a desert, an electricity generator in the mountains or a navigation beacon on an island. The object can send an equipment diagnostic report periodically and offer the possibility 25 for a remote user to retrieve information from or send commands to any module of the equipment connected to the internal data bus or network. These reports and information can be stored by the functionality application server and be used for the equipment maintenance and 30 repair. In case of a major problem detected by a sensor, the actual problem and equipment status can be reported.

Ink. t. Patent- och reg.verket

2000 -02- 2 5

Huvudfoxen Kassan

10

5

Data messages between the vehicle 13 and the CSCS 10 as well as between the CSCS 10 and the CSC 11, preferably has a standard format like for example Global Automotive Protocol for Telematics Standard (GATS). The data message must contain at least one service identifier (code) for selecting the requested service.

10

The modular architecture of the inventive system makes it applicable to both mobile vehicles and static equipment and even small airplanes.

The invention is not limited to the above-described embodiments, but several modifications are possible within the scope of the following claims.



Ink. t. Patent- och reg.verket

2000 -02- 2 5

Huvudfaxen Kassan

11

C.13264, 2000-02-25

## CLAIMS

5 1. A system for providing a communication link between a central station (11) and a remote mobile or stationary object (13) by means of transmitting and receiving communication means (14, 15) for speech and data transmission,

10 c h a r a c t e r i z e d i n  
that the communication link comprises both a speech transmission link between the central station (11) and the operator of the remote object (13), as well as a data transmission link between the remote object and the  
15 central station which is routed via a centralized communication and database server (10) for handling operator and/or object related information.

2. A system according to claim 1,  
20 c h a r a c t e r i z e d i n  
that the communication and database server (10) comprises a communication server (19) with functionality for handling operator and object identification, an operator and object information database (22) as well an  
25 application server (21) with functionality for making relevant information available to the central station (11).

3. A system according to claim 2,  
30 c h a r a c t e r i z e d i n  
that the application server (21) is provided with functionality for updating operator and object information.

Ink. t. Patent- och reg.verket

2000 -02- 2 5

12

Huvudfoxen Kassan

4. A system according to any one of claims 1-3,  
c h a r a c t e r i z e d i n  
that the communication links are established via a  
5 cellular communication network (14) or a satellite  
communication network (15).

5. A system according to claim 4,  
c h a r a c t e r i z e d i n  
10 that the central station (11) is a customer service center  
and the remote object (13) is a vehicle, a boat, a plane  
or a remote facility or plant.

6. An apparatus according to claim 5,  
15 c h a r a c t e r i z e d i n  
that the vehicle, boat or plane (13) is provided with a  
Global Positioning System, GPS (16), for providing  
information regarding its position.

20 7. Use of a system according to anyone of claims 1-6 for  
activating a service center response to a vehicle service  
request call.

25 8. A method for providing a communication link between a  
central station (11) and a remote mobile or stationary  
object (13),  
c h a r a c t e r i z e d i n the steps of  
establishing a speech connection between the central  
station (11) and the remote object (13), and  
30 simultaneously establishing data connections between the  
remote object and a communication and database server (10)  
as well as between the central station and said  
communication and database server (10).

Ink. t. Patent- och reg.verket


2000 -02- 2 5

Huvudfaxen Kassan

13

9. A method according to claim 8,  
c h a r a c t e r i z e d in the steps of  
locating the position of the remote object (13),  
5 controlling the functional and operational status of the  
remote object and its operator, and  
adapting the response to the type of service requested.

10. A method according to any one of claims 8-9,  
10 c h a r a c t e r i z e d in  
the steps of providing the communication and database  
server (10) with the functionality for adding, removing  
and updating services.



Ink. t. Patent- och reg.verket

2000 -02- 2 5


Huvudfaxen Kassan

14

## ABSTRACT

5 A system and a method for providing a communication link between a central station (11) and a remote mobile or stationary object (13) comprises transmitting and receiving communication means (14, 15) for speech and data transmission. The communication link comprises a speech transmission link between the central station (11) and the remote object (13). The communication link also comprises a data transmission link between the remote object and the central station which is routed via a centralized communication and database server (10) for handling operator and/or object related information. The method comprises the steps of establishing a speech connection between the central station (11) and the remote object (13), and simultaneously establishing data connections between the remote object (13) and the communication and database server (10) as well as between the central station and the communication and database server.

20 (Fig. 1)








Ink. t. Patent- och reg.verket

2000 -02- 2 5

Huvudfaxen Kassan

2:2

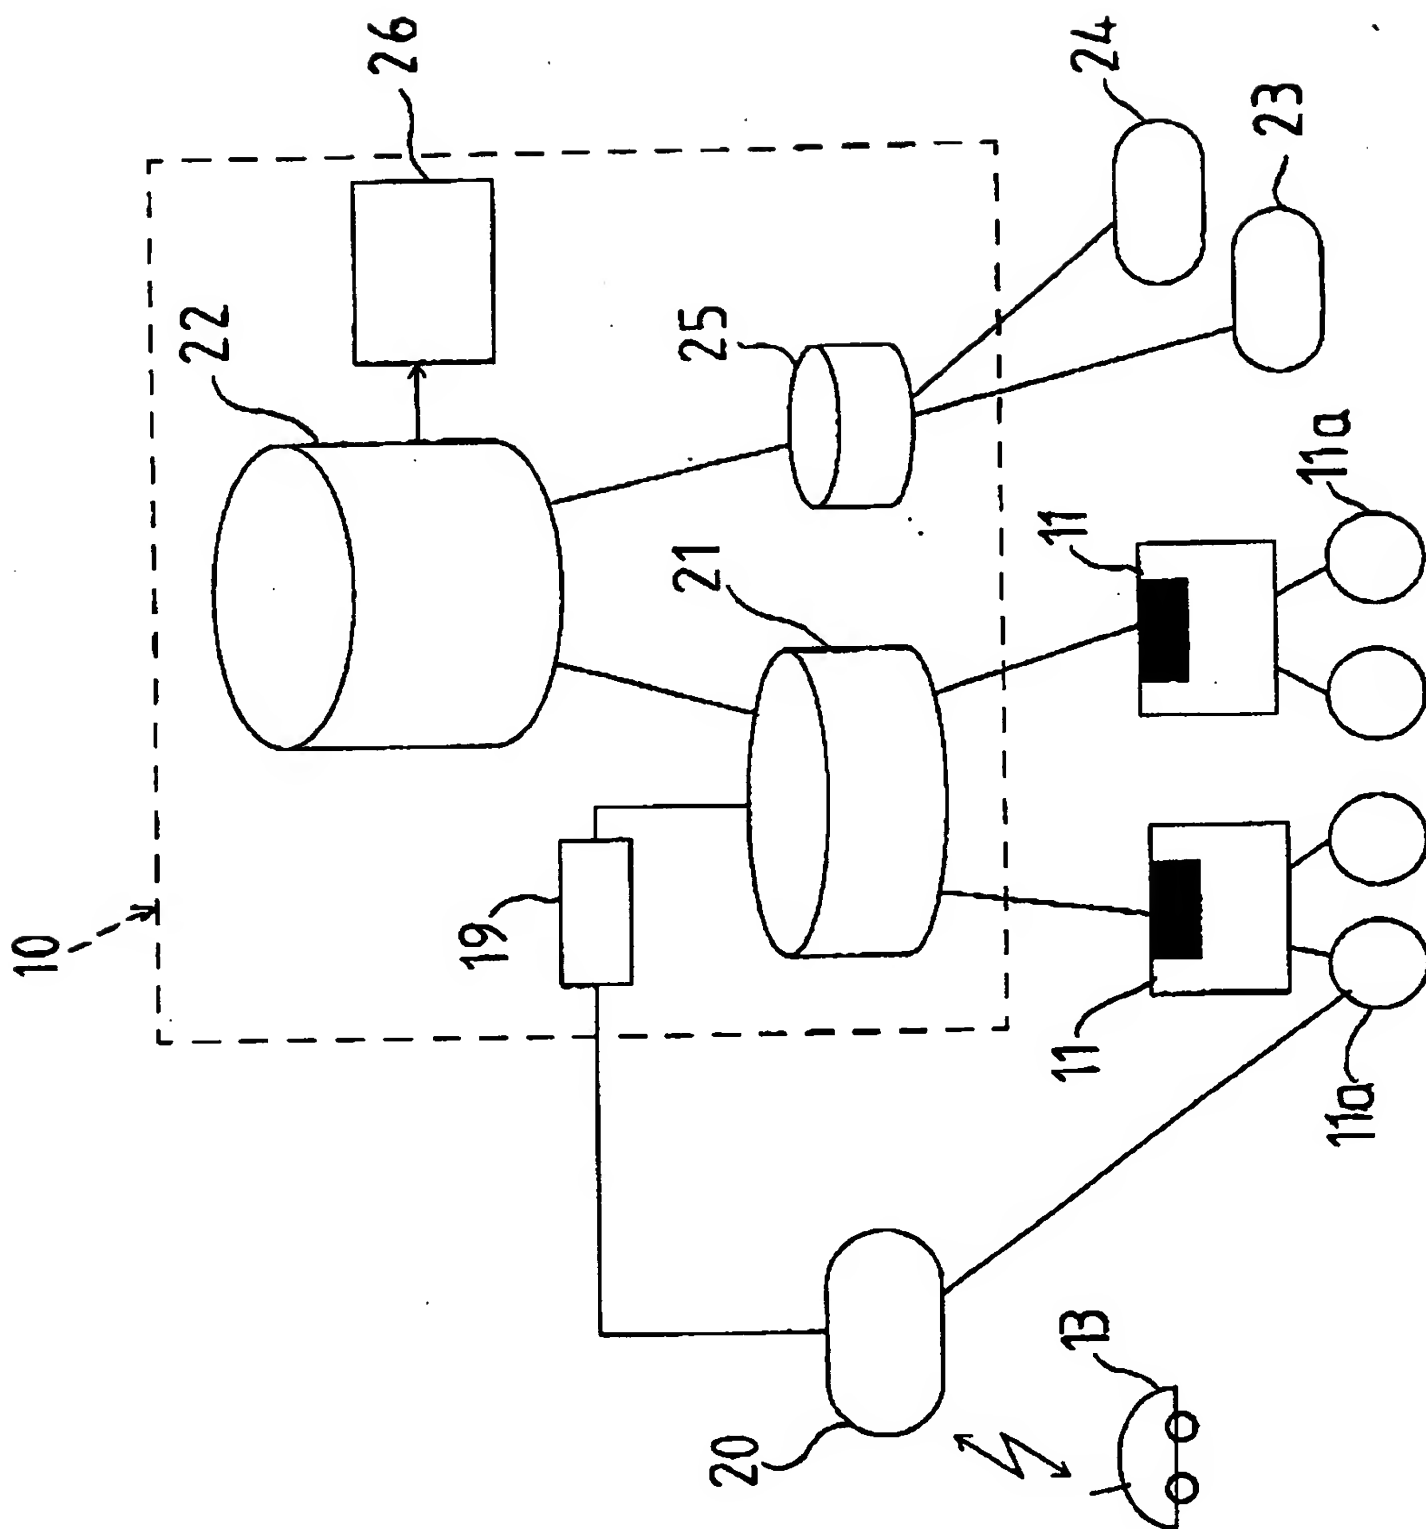

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**